

Model No:LZ-3528BIN1


Warm white TOP LED (1210)

Lead(Pb) Free Product-ROHS Compliant

■ Applications

1. Interior automotive lighting(dashboard backlight etc...)
2. Optical indicators
3. Communication Products
4. Backlighting
5. Toys

■ Package Dimensions(Units:mm)

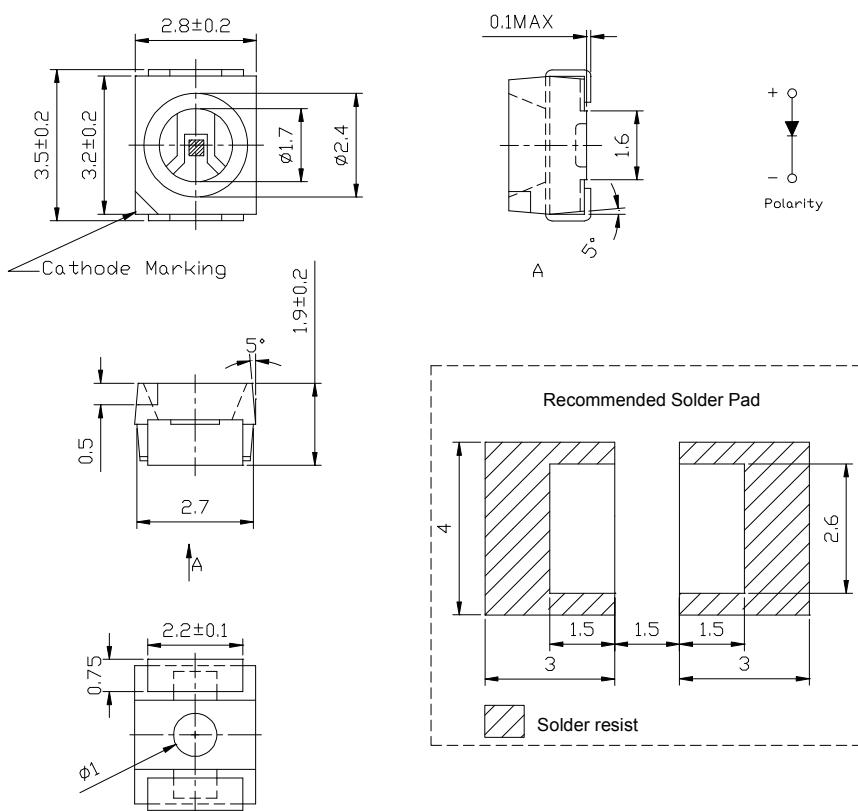

Notes:

All dimensions in mm tolerance is ± 0.1 mm unless otherwise noted.

■ Absolute Maximum Ratings (Ta = 25°C)

Items	Symbol	Absolute maximum Rating	Unit
Power Dissipation	P _D	100	mW
Forward Current(DC)	I _F	30	mA
Peak Forward Current*	I _{FP}	100	mA
Operation Temperature	T _{opr}	-40~+95	°C
Storage Temperature	T _{stg}	-40 ~ +100	°C

*Pulse width \leq 0.1msec duty \leq 1/10

■ Typical Electrical & Optical Characteristics (IF=20mA and Ta = 25°C)

Part No	CCT(K)	Forward Voltage (v)		Luminous Intensity (mcd)		Luminous Flux (lm)		Reverse Current (μ A)	50% Power Angle
		Min.	Typ.	Min.	Typ.	Min.	Typ.		
LZ-3528 BIN1	2600-3200	2.8	3.2	1900	2183	4.0	4.5	50	120


■ Notes

1. Tolerance of measurement of luminous intensity : $\pm 15\%$
2. Tolerance of measurement of chromatic coordinates : ± 0.02
3. Tolerance of measurement of forward voltage : $\pm 0.1V$


■ Chromatic Coordinates Ranks

	N11		N12		N13		N14	
X	0.4400	0.4496	0.4496	0.4592	0.4592	0.4694	0.4694	0.4797
Y	0.4530	0.4568	0.4568	0.4606	0.4606	0.4635	0.4635	0.4663
X	0.4473	0.4568	0.4568	0.4666	0.4666	0.4768	0.4768	0.4870
Y	0.4428	0.4467	0.4467	0.4504	0.4504	0.4532	0.4532	0.4560
	N21		N22		N23		N24	
X	0.4378	0.4473	0.4473	0.4568	0.4568	0.4666	0.4666	0.4768
Y	0.4390	0.4428	0.4428	0.4467	0.4467	0.4504	0.4504	0.4532
X	0.4449	0.4546	0.4546	0.4641	0.4641	0.4740	0.4740	0.4840
Y	0.4291	0.4327	0.4327	0.4365	0.4365	0.4404	0.4404	0.4432
	N31		N32		N33		N34	
X	0.4270	0.4359	0.4359	0.4449	0.4449	0.4546	0.4546	0.4641
Y	0.4197	0.4244	0.4244	0.4291	0.4291	0.4327	0.4327	0.4365
X	0.4342	0.4431	0.4431	0.4522	0.4522	0.4616	0.4616	0.4712
Y	0.4096	0.4143	0.4143	0.4191	0.4191	0.4228	0.4228	0.4267
	N41		N42		N43		N44	
X	0.4168	0.4253	0.4253	0.4342	0.4342	0.4431	0.4431	0.4522
Y	0.3995	0.4049	0.4049	0.4096	0.4096	0.4143	0.4143	0.4191
X	0.4243	0.4328	0.4328	0.4416	0.4416	0.4505	0.4505	0.4594
Y	0.3891	0.3947	0.3947	0.3993	0.3993	0.4040	0.4040	0.4087
	N45		N51		N52		N53	
X	0.4159	0.4243	0.4243	0.4342	0.4342	0.4431	0.4431	0.4522
Y	0.4087	0.4127	0.4127	0.4228	0.4228	0.4327	0.4327	0.4423
X	0.4243	0.4328	0.4328	0.4416	0.4416	0.4505	0.4505	0.4594
Y	0.3891	0.3947	0.3947	0.3993	0.3993	0.4040	0.4040	0.4127
X	0.4312	0.4396	0.4396	0.4485	0.4485	0.4574	0.4574	0.4689
Y	0.3794	0.3849	0.3849	0.3896	0.3896	0.3943	0.3943	0.4087


■ Typical Electrical/ Optical Characteristics Curves ($T_a=25^\circ\text{C}$ Unless Otherwise Noted)

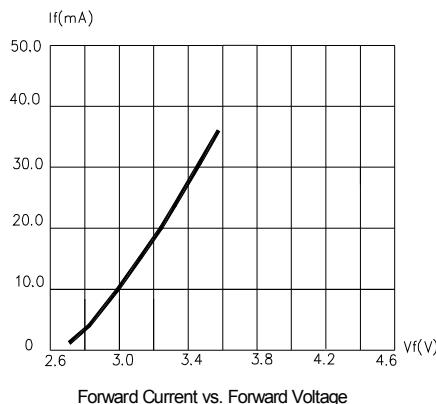


Forward Current vs. Forward Voltage

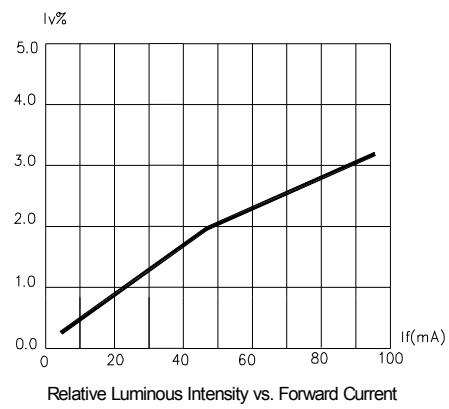


Relative Luminous Intensity vs. Forward Current

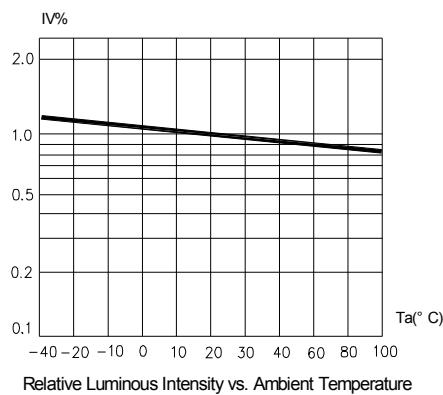


Relative Luminous Intensity vs. Ambient Temperature

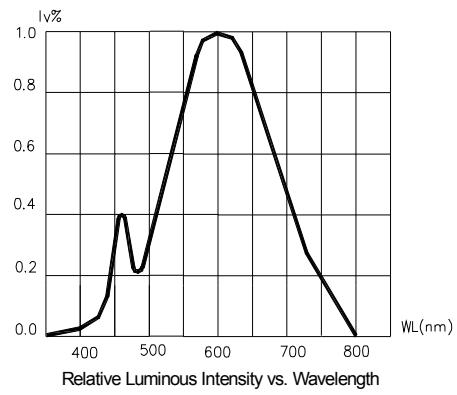

Relative Luminous Intensity vs. Wavelength

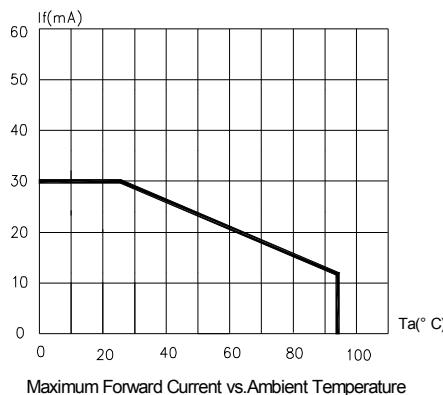


Maximum Forward Current vs. Ambient Temperature

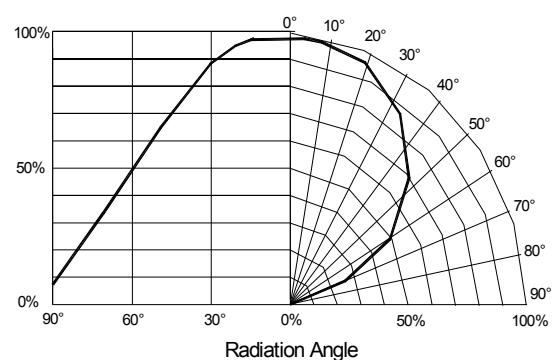


■ Soldering heat reliability:


Lead Solder

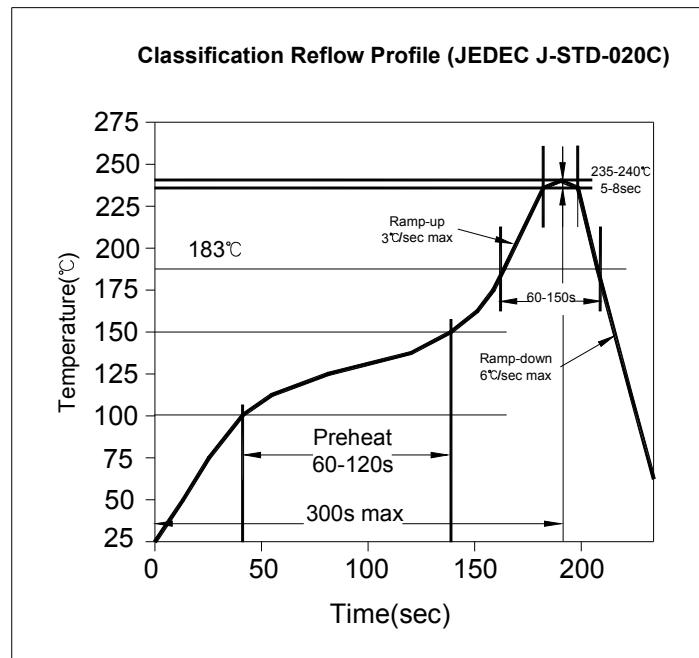


Lead Free Solder

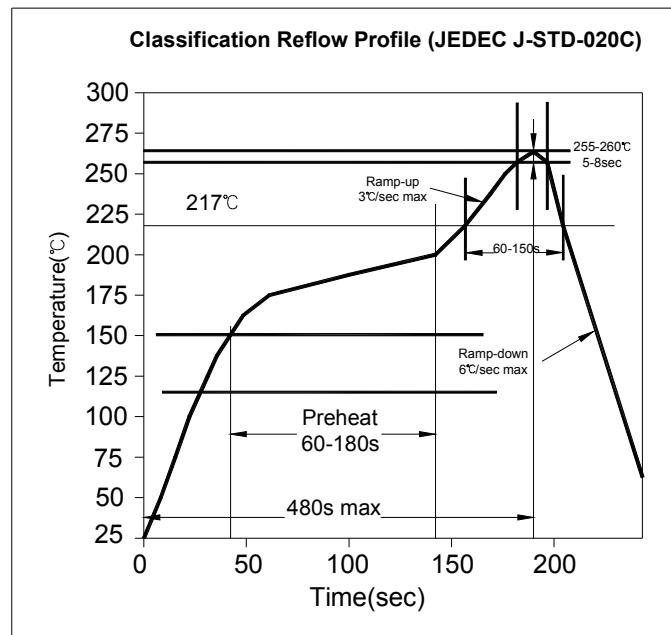

■ Packing Specifications: (Units:mm)

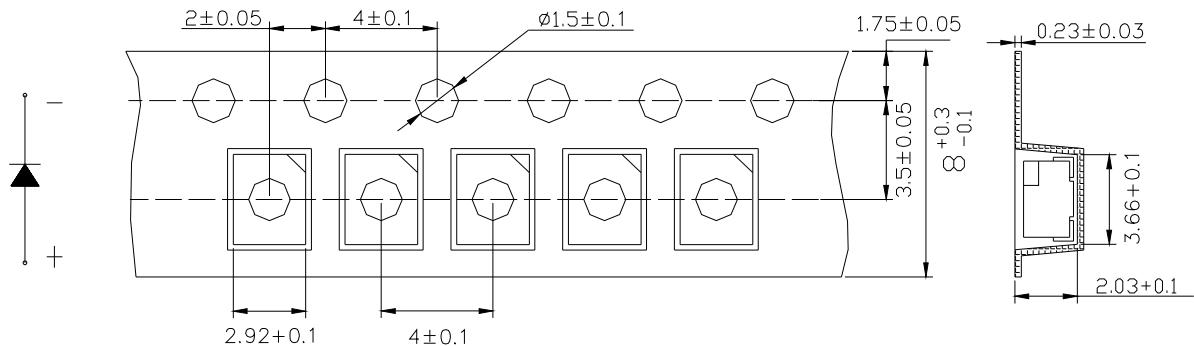

■ Reel Specifications: (Units:mm)

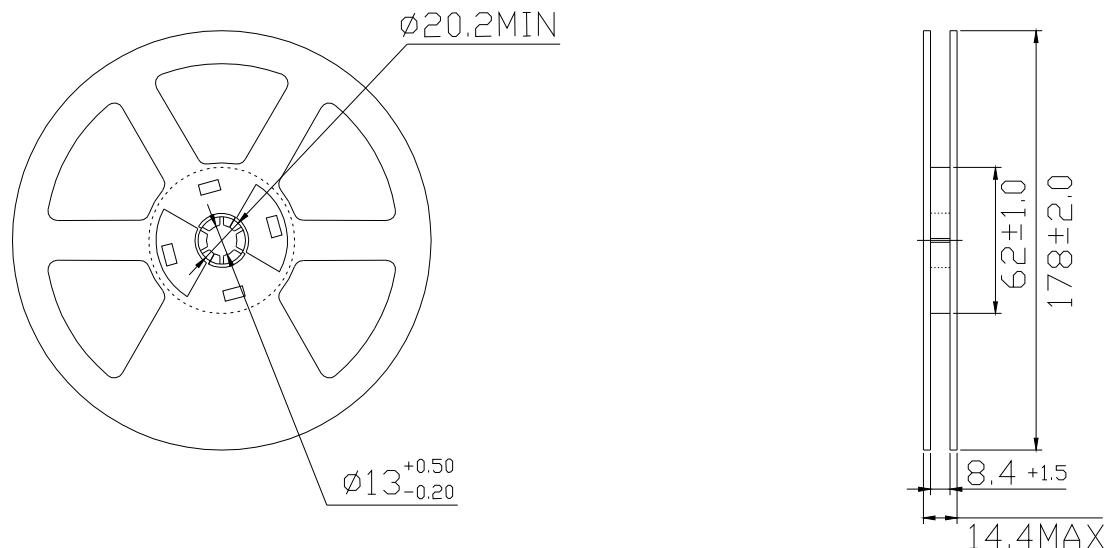

Dimensions are specified as follows:mm

Notes:


- 1) The packing only appropriate for LZGD
- 2) Normal packing quantity: 2,000pcs/reel

■ Handling Precautions


Compare to epoxy encapsulant that is hard and brittle, silicone is softer and flexible. Although its characteristic significantly reduces thermal stress, it is more susceptible to damage by external mechanical force.

As a result, special handling precautions need to be observed during assembly using silicone encapsulated LED products. Failure to comply might leads to damage and premature failure of the LED.


1. Handle the component along the side surfaces by using forceps or appropriate tools.



2. Do not directly touch or handle the silicone lens surface. It may damage the internal circuitry.




3. Do not stack together assembled PCBs containing exposed LEDs. Outside impact may scratch the silicone lens or damage the internal circuitry.



4. The outer diameter of the TOP LED pickup nozzle should not exceed the size of the LED to prevent air leaks. The inner diameter of the nozzle should be as large as possible.
5. A pliable material is suggested for the nozzle tip to avoid scratching or damaging the LED surface during pickup.

6. The dimensions of the component must be accurately programmed in the pick-and-place machine to insure precise pickup and avoid damage during production.

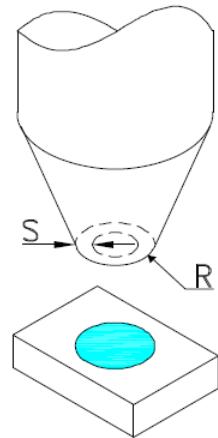

Revision History					
Rev.No.	Change Description	Date	Prepared By	Checked By	Approved By
A1	New-made specification	2013/01/04	YQJ	Junney	Junney